

○ Fixed Hydraulic Dock Leveler (Yard Ramp)

Product Description

⇒ Fixed hydraulic dock leveler renders adjustable working height according to truck, high efficiency.



Parameters


Model	Loading Capacity (T)	Platform Size (MM)	Lippad width (MM)	Stroke (MM)	Power (KW)	NetWeight (KG)	Ditch Size LXWXH(MM)
DCQ6-0.55	6	2000 × 2000	400	250 250	0.75	1200	2080 × 2040 × 600
DCQ6-0.7	6	2500 × 2000	400	400 300	0.75	1300	2580 × 2040 × 600
DCQ8-0.55	8	2000 × 2000	400	300 250	0.75	1250	2080 × 2040 × 600
DCQ8-0.7	8	2500 × 2000	400	400 300	0.75	1360	2580 × 2040 × 600
DCQ10-0.55	10	2000 × 2000	400	300 250	0.75	1300	2080 × 2040 × 600
DCQ10-0.7	10	2500 × 2000	400	400 300	0.75	1400	2580 × 2040 × 600


⇒ Standard configuration

- ◆Hydraulic system from Italy
- ◆Maintenance supporting shaft
- ◆Safety plate
- ◆Rubber buffering pad

⇒ Optional configuration

- ◆AC 220/50Hz
- ◆Hydraulic system with stop device

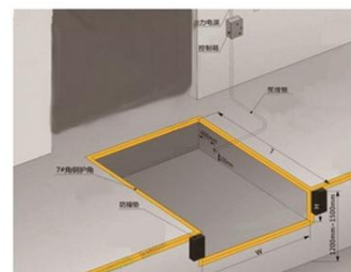

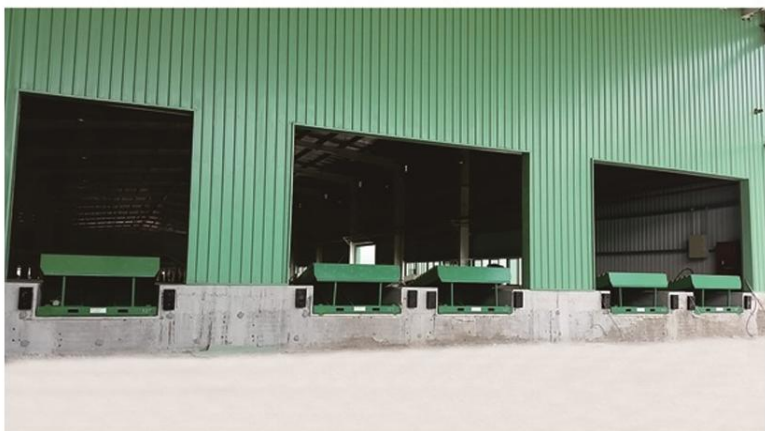

PT. NATRACO TUNAS CITRA

Jl. Kerajinan No. 8, Jakarta 11130
 Phone : (021) 631 3333, 626 0083
 Fax : (021) 639 4243
 Email : admin.awp@natraco.co.id
 Website : www.natraco.co.id