






ZDYC


SERIES ELECTRIC STACKER

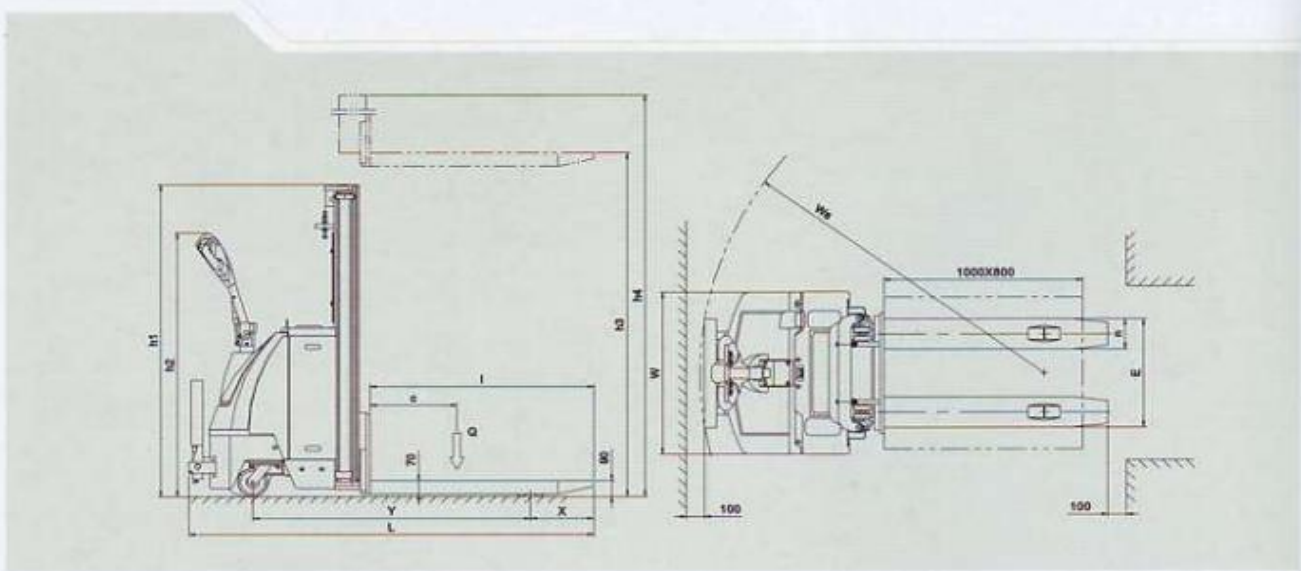

Model No.		ZDYC10-25	ZDYC10-30	ZDYC10-35	ZDYC15-25	ZDYC15-30	ZDYC15-35	ZDYC20-25
Rated Capacity (Q)	kg	1000			1500			2000
Load Center (C)		500			400			
Max. Fork Height (h3)		2500	3000	3500	2500	3000	3500	2500
Max. Machine Height (h4)		2975	3475	3975	2975	3475	3975	3095
Handle Height (h2)		1385~1405						
Fork Size (lxn)	mm	1125x160						
Fork Width (E)		570						
Min. Turning Radius (Wa)		1700			1750			
Wheel Base (Y)		1348			1398			
Front-Wheel Distance (X)		370			320			
Max. Speed Without Load	km/h	4.5~5			5~6			
Max. Speed With Load		3.8~4.2			4~5			
Max. Travel Grade	%	8~10						
Driving Motor	v/kw	24/1.2			24/1.2~1.3			
Lifting Motor		24/2~3						
Battery	v/Ah	24/240~270						
Charger	v/A	24/30~40						
Overall Length (L)		2040						
Overall Width (W)	mm	856						
Overall Height (h1)		1770	2020	2270	1770	2020	2270	1890
Overall Net Weight	kg	858	880	900	888	910	930	988



ZDYC SERIES ELECTRIC STACKER

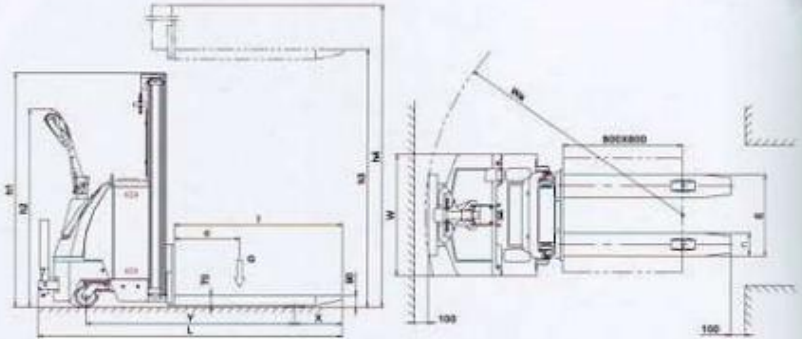

Model No.	ZDYC10-40	ZDYC10-45	ZDYC10-50
Rated Capacity (Q)	kg 1000		
Load Center (C)	400		
Max. Fork Height (h3)	4000	4500	5000
Max. Machine Height (h4)	4540	5040	5540
Handle Height (h2)	1385~1405		
Fork Size (lxn)	mm 1125x160		
Fork Width (E)	685		
Min. Turning Radius (Wa)	1750		
Wheel Base (Y)	1398		
Front-Wheel Distance (X)	337		
Max. Speed Without Load	km/h 5~6		
Max. Speed With Load	4~5		
Max. Travel Grade	% 8~10		
Driving Motor	v/kw 24/1.2~1.3		
Lifting Motor	24/2~3		
Battery	v/Ah 24/240~270		
Charger	v/A 24/30~40		
Overall Length (L)	2060		
Overall Width (W)	mm 856		
Overall Height (h1)	1935	2100	2265
Overall Net Weight	kg 1000	1025	1050