

## ○ Mobile Scissor Lift


### Product description

- Made of wide section manganese steel providing more stability when lifting
- Inching control for lifting and lowering, ground / platform control mode could be switched.
- Control voltage: DC 24V
- Equipped emergency lowering device, enable safe lowering when power off
- Double contactors and double limit switches are provided
- In chassis is slide-out engine tray, convenient for maintenance
- Forklift pockets are made for transportation



### Parameters

Model	SJY0.45-5	SJY0.45-6A	SJY0.45-6B	SJY0.45-8	SJY0.45-10	SJY0.45-12
Max platform height (mm)	4900	5900	6000	8000	10000	11800
Min platform height (mm)	900	980	1080	1200	1360	1480
Platform size (mm)	1450*600	1700*750	2300*800	2300*800	2300*1120	2300*1120
Rated load (kg)	450	450	450	450	450	450
Lifting time (s)	50	60	70	90	100	110
Voltage (v/hz)	AC380/50	AC380/50	AC380/50	AC380/50	AC380/50	AC380/50
Motor Power (kw)	1.1	1.5	1.5	1.5	2.2	2.2
Overall length (mm)	1500	1900	2550	2550	2550	2550
Overall width (mm)	750	900	1050	1050	1400	1400
Overall height (rails up) (mm)	2080	2160	2260	2380	2540	2660
(rails down) (mm)	1540(folded)	1620(folded)	1260(neart)	1380(neart)	1540(neart)	1660(neart)
Extended outrigger size (mm)	1400*1400	1650*1650	1800*2270	1800*2270	2250*2270	2250*2270
Tire (Φ)	250	250	400-8	400-8	500-8	500-8
Overall weight (kg)	450	650	1200	1350	1700	1850

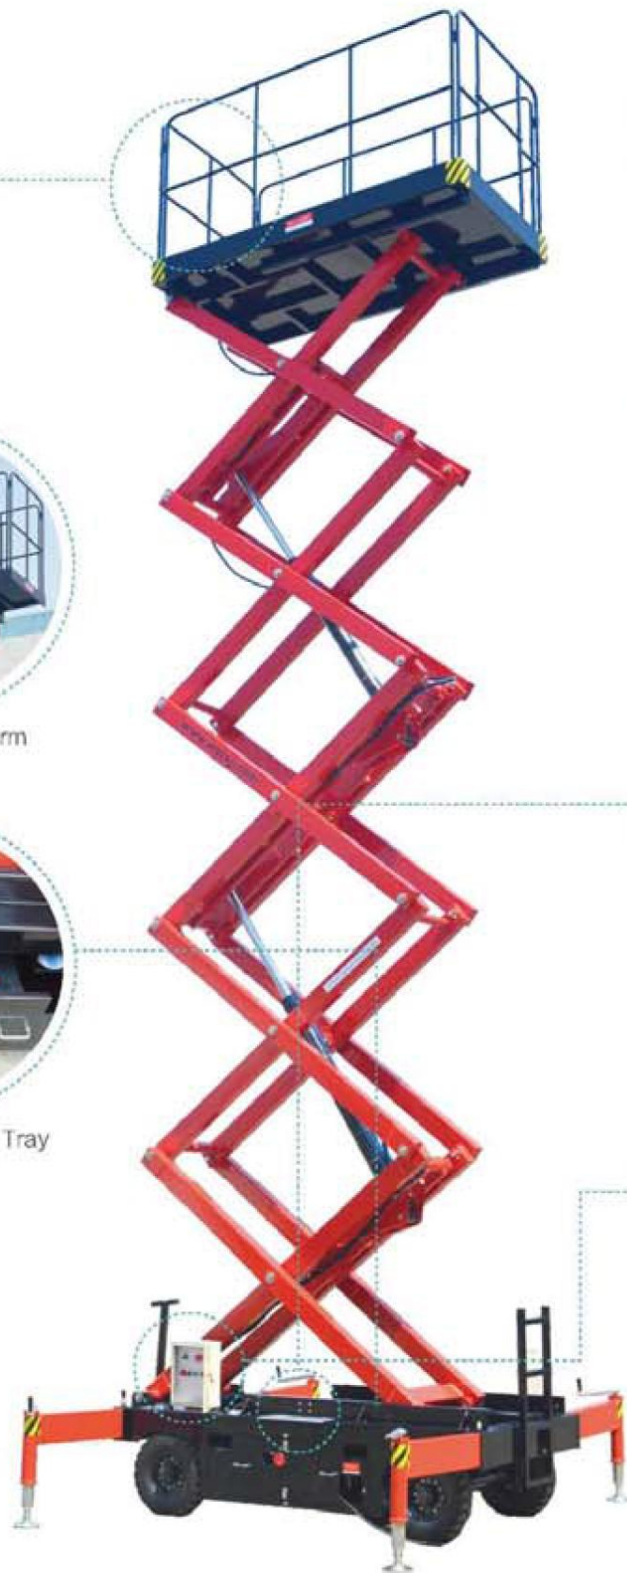

Extension Platform



Slide-out Engine Tray

### Standard Configuration

- AC 380V
- Emergency lowering valve
- Leveling device with supporting screw
- Waterproof electric box
- Emergency stop button

### Optional Configuration

- AC 220V, DC (for max 12m platform),
- AC/DC, manual hydraulic pump
- Italian hydraulic system
- Explosion proof electric control system
- Rubber solid tire
- Extension platform
- Electric moving device



Level



Electric Control Box